


Cable Tie Range

Nylon 66




Colour: White and Black

Part no. suffix: White 'WT', Black 'BK'

Temperature Range: -10°C to 85°C

Flammability rating: UL 94V-2

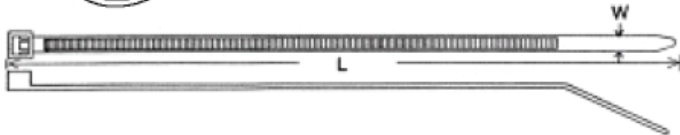

Part No.	Code Suffix		Length mm	Width mm	Max. Bundle Ømm	Min. Tensile Strength kg	Pack Qty
	WHITE	BLACK					
HPTSL-80-M-	WT	BK	80	2.5	15	8.0	1000
HPTSL-90-M-	WT	BK	90	2.5	17	8.0	1000
HPTSL-102-M-	WT	BK	102	2.5	19	8.0	1000
HPTSL-120-M-	WT	BK	118	2.5	30	8.0	1000
HPTSL-160-M-	WT	BK	155	2.5	40	8.0	1000
HPTSL-200-M-	WT	BK	196	2.5	50	8.0	1000
HPTSL-140-I-	WT	BK	140	3.6	34	17.8	1000
HPSTL-200-I-	WT	BK	202	3.6	50	17.8	1000
HPTSL-300-I-	WT	BK	295	3.6	77	17.8	100
HPTSL-370-I-	WT	BK	368	3.6	100	17.8	100
HPTSL-120-S-	WT	BK	120	4.8	25	22.2	1000
HPTSL-160-S-	WT	BK	160	4.8	40	22.2	1000
HPTSL-190-S-	WT	BK	186	4.8	46	22.2	1000
HPTSL-200-S-	WT	BK	200	4.8	50	22.2	1000
HPTSL-250-S-	WT	BK	252	4.8	60	22.2	1000
HPTSL-290-S-	WT	BK	286	4.8	75	22.2	100
HPTSL-300-S-	WT	BK	298	4.8	80	22.2	100
HPTSL-370-S-	WT	BK	368	4.8	100	22.2	100
HPTSL-430-S-	WT	BK	428	4.8	115	22.2	100

Self Adhesive Cable Tie Mount

Part No HPDSM101

Length	Width	Height	Pack
19mm	19mm	3.5mm	100