



Strain Relief Bushings


HALO

- Nylon 66 moulding flame resistant, self extinguishing to UL94V2
- UL approved
- Colour: black or white

Assembly Procedure

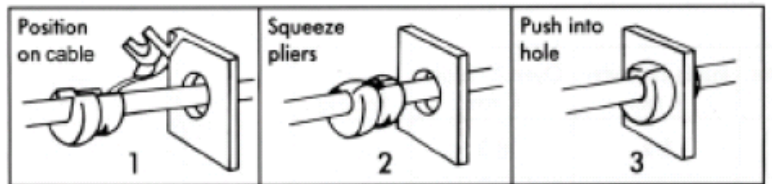

F = Maximum Chassis Thickness



Mounting Hole Dimensions

Part No.	Cross Section Shape	Approx. Cable Size	Mounting Holes		Max. Thickness	Length	Pack Size
		mm	A mm	B mm	F mm	D mm	1000 Pcs
HP2P-4	Flat	3 x 5.6	9.5	8.7	1.6	10.3	1000 Pcs
HP3P-4		3 x 5.6	11	9.9	1.6	10.3	
HP3W-1		3 x 5.6	11	9.9	2.5	10.3	
HP4N-4		3.71 / 3.8 x 7.6	12.7 - 13.1	11.8	1.6	10.3	
HP4K-4	3.71 / 3.8 x 7.6	12.7 - 13.1	11.8	2.5	10.3	500 Pcs	
HP5N-4	Round	6.4Ø - 7.4Ø	12.7 - 13.1	11.5	1.6		11
HP5P-4		6.4Ø - 7.4Ø	12.7 - 13.1	11.5	2.5		11
HP6N-4		7.6Ø	15.9	14	1.6		14.8
HP6P-4		7.6Ø	15.9	14	3.2		14.8
HP6N3-4	8.2Ø - 9.2Ø	15.9	14	1.6	14.8		100 Pcs
HP6P3-4	8.2Ø - 9.2Ø	15.9	14	3.2	14.8		
HP7N-2	9.2Ø - 10.5Ø	19	16.8	1.6	19		
	11Ø	19.8					
HP7P-2	9.2Ø - 10.5Ø	19	16.8	3.2	19		
	11Ø	19.8					
HP8P-2	9.2Ø - 10.5Ø	22.2	21.3	3.2	20.8		