





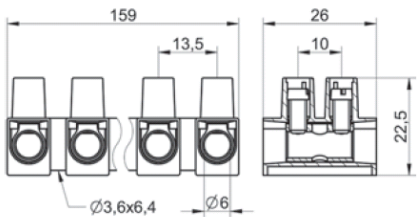






Técnica de conexiones

TEKOX

Since 1976

MADE IN SPAIN

1116	Voltage 750V (600V UL)	Current rating 76A (65A UL)	 1,2 Nm	 M 4	 110°C	 ways	 100 pcs. 300x238x166 mm	 8 Kg
			 <p>SOLID CABLE 16 mm² / 4 mm² (6 AWG)</p>	<p>1116 PH wire protector PH 10 mm² (6 AWG) / 57A (65A UL)</p> 		9 Kg		
		 <p>STRANDED CABLE 10 mm² / 4 mm² (6 AWG)</p>	<p>1116 TS middle barrier TS</p> 		9 Kg			