








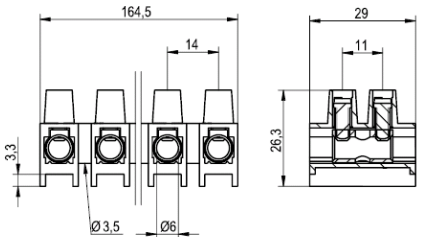



Técnica de conexiones

TEKOX

Since 1976

MADE IN SPAIN

1216 	Voltage 750V (600V UL)	Current rating 76A (65A UL)	 1,2 Nm	 M 4	 110°C	 12 ways	 90 pcs. 300x238x166 mm	 8,5 Kg
	 SOLID CABLE 16 mm ² / 4 mm ² (6 AWG)	1216 PH wire protector PH 10 mm ² (6 AWG) / 57A (65A UL)		 STRANDED CABLE 10 mm ² / 4 mm ² (6 AWG)	 05.1	8,5 Kg		
		1216 TS middle barrier TS			8,5 Kg			