



ACCELERATE THE SANITIZING POWER
OF UV RAYS



vega[®]UV-C

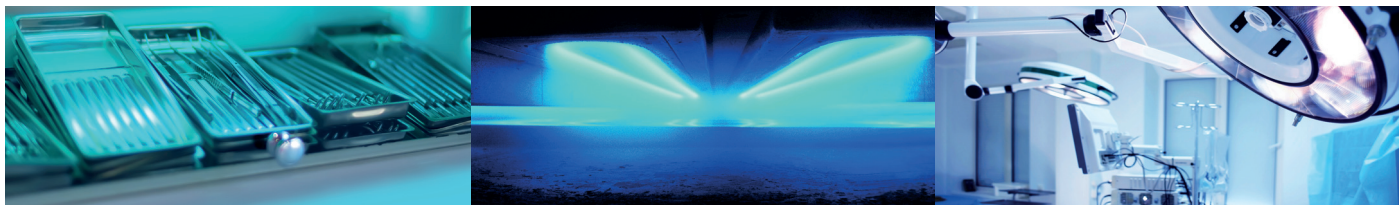

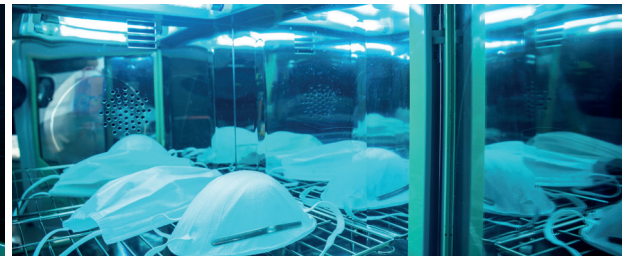

vega[®]UV-C is the high-reflective aluminium surface designed specifically by Almeco to accelerate the sanitizing power of UV rays.

Why vega[®]UV-C? Ultraviolet light offers a quick and effective solution to sterilize and sanitize environments and objects.

The UV-C band (the wavelengths between 200 nm and 280 nm) is considered “UV germicidal”.

vega[®]UV-C increases the effectiveness of the UV system through reflection; its highly reflective aluminum surface allows to reach 91% of the UV rays reflection thus increasing the disinfection power.

Why specifically UV-C rays? The UV-C radiation is absorbed by the DNA and RNA of micro-organisms, such as viruses and bacteria, modifying their structure and hindering their reproduction. With a sufficiently powerful radiation intensity, the UV-C is a very reliable, fast and environmentally friendly disinfection method because it doesn't require the use of chemical agents.


How to use vega[®]UV-C? **vega[®]UV-C** reflective aluminum surface can be used to cover internal walls of equipment and medical devices.

To considerably improve the effectiveness and efficiency of the appliances, Almeco's optical engineers support you in the development and production of reflectors to optimize the emission of UV radiation by concentrating it where it is needed.







SPECTRUM UV-C EFFECTIVENESS

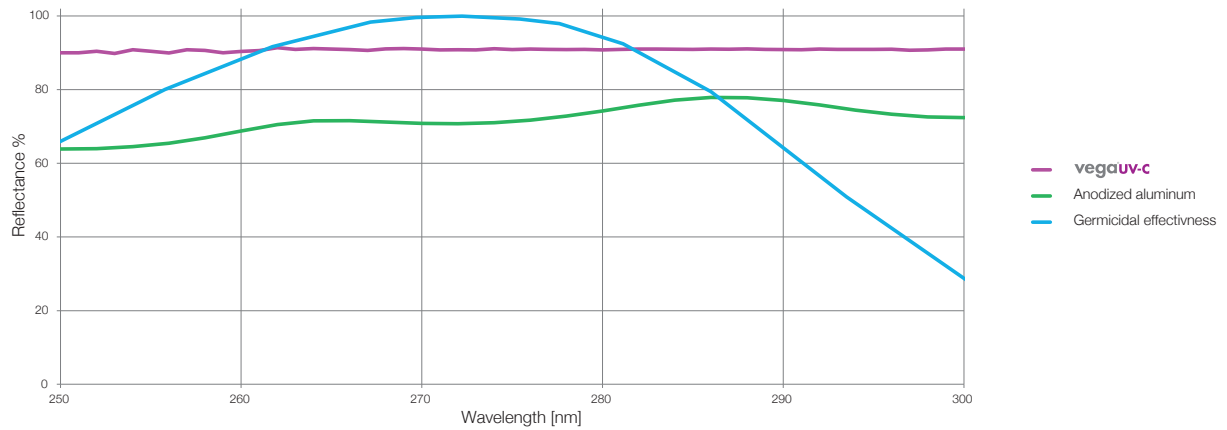

SPECTRUM MATERIALS COMPARISON

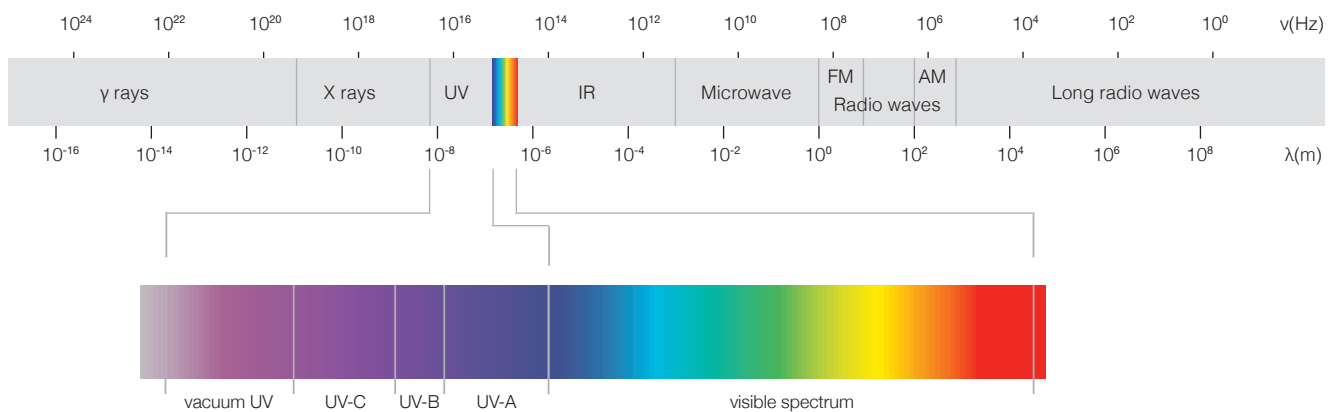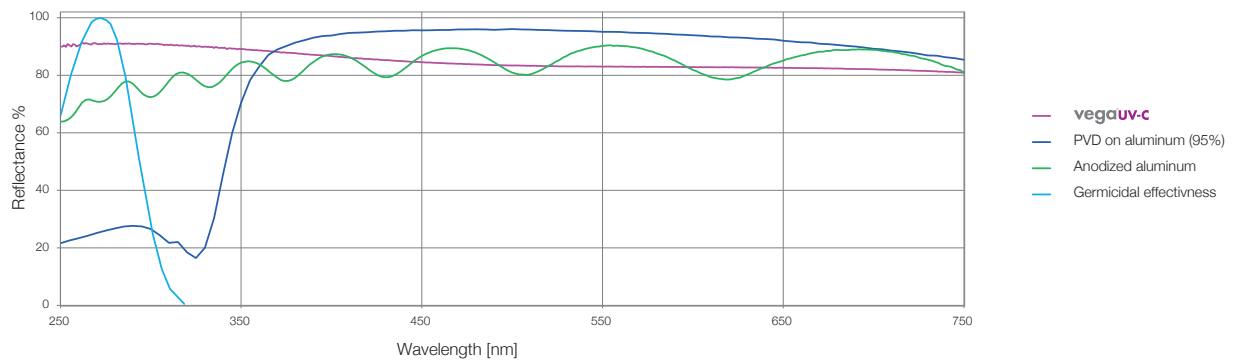

We contribute to sanitize the environmental with quick and sustainable solutions.



OPTICAL VALUES

	Typical	Standards
VUV-C: HEMISPHERIC REFLECTANCE @ 254nm	90% ± 2%	-
VUV-C: HEMISPHERIC REFLECTANCE @ 270nm	91% ± 2%	-
VUV-C: HEMISPHERIC REFLECTANCE @ 280nm	90.5% ± 2%	-
IRIDESCENCE	absent	INTERNAL
COLOUR VALUES – a*	-3 < a* < 2	CIE Lab (D65 / 10°)
COLOUR VALUES – b*	-5 < b* < 2	CIE Lab (D65 / 10°)

ENVIRONMENTAL STABILITY

Conditions	Time	Reflectance change	Cross hatch test	Standards
OVEN – 250°C	500 h	< 1%	OK	
CLIMATE CHAMBER 85°C – 85% r.H.	1000 h	< 1%	OK	
UV 0.53W/m² @ 340nm	500 h	< 1%	OK	
Condensation test (60°C / rH 5%)	100 h	< 1%	OK	

MECHANICAL STABILITY

	Value	Standards
CROSS HATCH TEST	No more than 2 of 100 test fields delaminating	ISO 2409 / ASTM D 3359

AVAILABLE SIZES

THICKNESS	0.30mm – 0.40mm – 0.50mm – 0.70mm – 0.75mm – 1.0mm
WIDTH	≤ 1250mm



Almeco SpA

Via della Liberazione 15
20098 San Giuliano M.se (Mi) - Italy
T +39 02 988963 1
F +39 02 988963 99
almeco@almecogroup.com

Almeco GmbH

Claude Breda Strasse, 3
D-06406 Bernburg - Germany
T +49 3471 3465500
F +49 3471 3465509
info.de@almecogroup.com

Almeco USA Inc.

1610 Spectrum Drive
Lawrenceville, GA 30043 - USA
T +1 770 449 3454
F +1 770 449 3677
info@almecousa.com